

## MIXING INSTRUCTIONS FOR LAST PATCH™ LIMESTONE

Kit Contents:       - 1.72 lbs of “A” (in quart can)  
                          - (4) tubes of “B”

Mixing Instructions: Limestone Last Patch™ is mixed 7 parts (by weight) of “A” side (thick paste) to 1 part “B” side (clear watery). There are two different methods for achieving this mix ratio:

### METHOD #1:

- 1) Take one cup and fill it until it reaches the 1 oz mark with part “A”.  
(This gives you 49 grams of “A”)
- 2) Take another cup and fill it with part ”B” until it reaches the 1 tsp mark.  
(This gives you 7 grams of ”B”)
- 3) In a separate container combine both “A” and “B” from the above containers and thoroughly mix the material and immediately use.

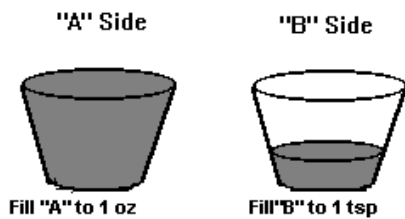


Figure 1: Method #1 Fill Levels

- 1) Take a cup and fill to top with part “A” three times. (This gives you 150 grams of part “A”)
- 2) Empty an entire tube of the “B” side.
- 3) In a separate container thoroughly mix the material that was just measured out and immediately use.

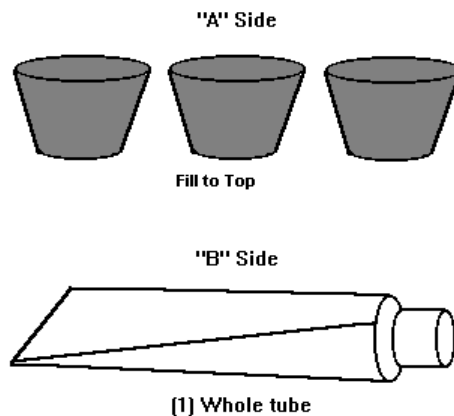


Figure 2: Method #2 Fill Levels

### METHOD #2:

#### Mixing Tips:

- Product is a 7:1 ratio by Weight
- If desired you can add up to 10% of your own stone dust.
- Wear latex gloves to form the material around corners.
- Use powdered tints to adjust for variations in stone color.
- Apply the material as flush as possible on the surface of the stone before dry grinding, thus reducing grinding time.
- Mix to a mortar consistency.



Bonstone Materials Corporation  
707 Swan Drive Mukwonago, Wisconsin 53149  
www.Bonstone.com